

CG45 Series



Features

- 4 1/2" dial size
- Phosphor bronze bourdon tube and brass connection
- Corrosion resistant stainless steel case and ring
- Dual Scales Available
- 1% full scale accuracy per ASME B40.1 Grade 1A
- 1/4" NPT bottom connection
- Suitable for water, air, oil, gas or any medium not corrosive to copper alloys

Optional Extras

K Dual Scale PSI/KPA
B Dual Scale PSI/Bar

LF Lead Free

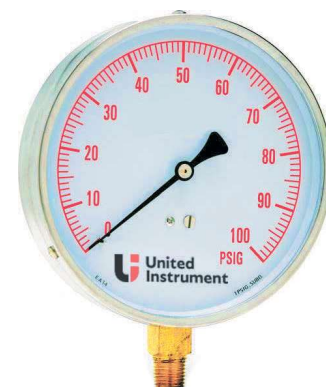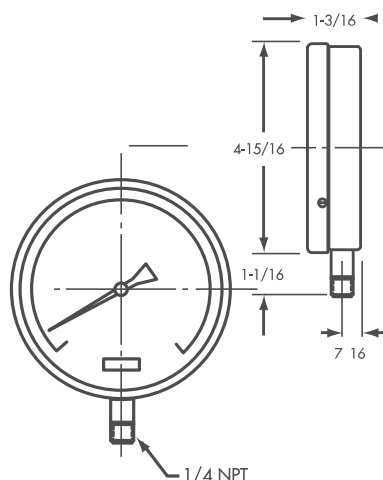

Pressure Ranges

Catalog #	Dial Range	Figure Intervals	Smallest Graduation
<i>Single Scale</i>	<i>PSI Only</i>	<i>PSI</i>	<i>PSI</i>
CG4515	0-15	1	0.25
CG4530	0-30	5	0.5
CG4560	0-60	10	1
CG45100	0-100	10	1
CG45160	0-160	20	2
CG45200	0-200	20	2
CG45300	0-300	50	5
CG45500	0-500	50	5

Vacuum/Compound Ranges

Catalog #	Dial Range	Figure Intervals	Smallest Graduation
<i>Single Scale</i>	<i>PSI Only</i>	<i>PSI</i>	<i>PSI</i>
CG4530/0	30-0" HG VAC	5" HG	.5 HG
CG4530/30	30"-0-30	10"HG/10 PSI	1"HG/1 PSI
CG4530/100	30"-0-100	15"HG/10 PSI	5"HG/1 PSI
CG4530/150	30"-0-150	30"HG/25 PSI	5"HG/5 PSI
CG4530/300	30"-0-300	20"HG/50 PSI	5"HG/5 PSI

How to Order

Example Product #: **CG45200 LF 160**

Catalog #	Optional Extra (Leave Blank if None)	Top Pressure
CG45200	LF	160