

# Hot Water Thermometer

For use on: hot water lines, boilers and hydronic heating.

**Dial:** Aluminum

**Accuracy:**  $\pm 1\%$

**Scale:** Dual ( $^{\circ}\text{F}$  &  $^{\circ}\text{C}$ )

**Lens:** Glass


**Case:** Aluminum

**Ring:** Steel, chrome plated

**Thermowell:** Brass (HPB59-1),  
1/2" NPT standard, separable


**Sensing Element:** Bi-metallic

**Pointer:** Aluminum, painted black



| Dial        | Range                                                                                                | Connection     | Code        |
|-------------|------------------------------------------------------------------------------------------------------|----------------|-------------|
| 2.5" (63mm) | 30 $^{\circ}\text{F}$ to 250 $^{\circ}\text{F}$<br>(0 $^{\circ}\text{C}$ to 120 $^{\circ}\text{C}$ ) | 1/2" NPT       | UI254B40250 |
| 2.5" (63mm) | 30 $^{\circ}\text{F}$ to 250 $^{\circ}\text{F}$<br>(0 $^{\circ}\text{C}$ to 120 $^{\circ}\text{C}$ ) | 3/4" Sweatwell | SNAP40250   |
| 2.5" (63mm) | 30 $^{\circ}\text{F}$ to 250 $^{\circ}\text{F}$<br>(0 $^{\circ}\text{C}$ to 120 $^{\circ}\text{C}$ ) | 1/2" Sweatwell | SNAP30250   |

2.5" NPT Type

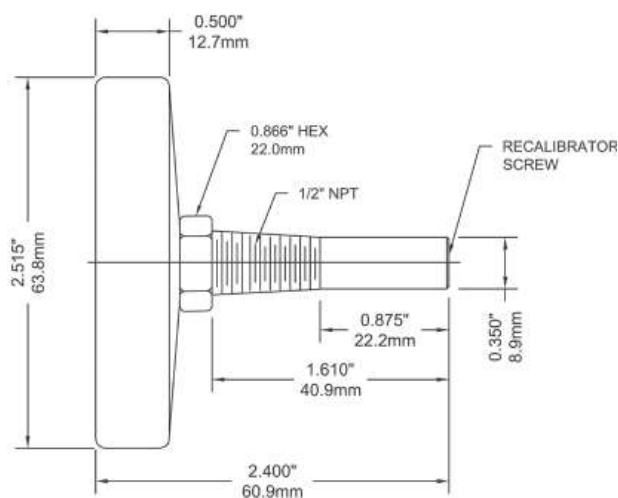

2.5" Sweatwell Type

